



ACO ShowerDrain February 2019

ShowerPoint with Quadrato grate







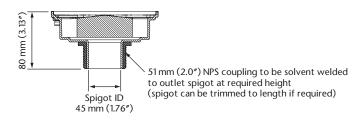

Product Table

51 mm (2.00") NPS outlet

Description	ShowerPoint body w/ Quadrato locking grate	ShowerPoint body w/ Quadrato non-locking grate	Optional LED light Red	Optional LED light Green	Optional LED light Blue	Optional LED light White
Part No.	37233	37225	37286	37258	37259	37257
Weight	0.72	0.72	0.22	0.22	0.22	0.22
lbs	(1.6)	(1.6)	(0.5)	(0.5)	(0.5)	(0.5)

Specification Clause

The ACO ShowerPoint shower outlet body shall be chrome plated ABS plastic as manufactured by ACO, Inc. USA. A decorative stainless steel edge frame shall also be provided. The locking*/ non-locking* grate shall be manufactured from grade 304 stainless steel with 'Quadrato' slot style.

Shower outlet shall be 148 mm (5.83") square, with 51 mm (2.0") diameter outlet spigot (O.D.). Grate shall provide a minimum intake area of 31.6 cm 2 (4.9 sq 2). Outlet shall provide minimum outlet flow rate of 0.59 L/s (9.5GPM) where installed to allow 5 mm (0.2") head of water <u>OR</u> 1.09 L/s (7.4GPM) where installed to allow 15 mm (0.6") head of water.

Connection to plumbing shall be either with 51 mm (2.0")NPS threaded coupling (supplied with outlet) that shall be solvent welded to outlet spigot*/ 51 mm (2.0") no-hub adjustable coupling (available from ACO or others)*, or a solvent weld connection*.

ACO recommends checking local plumbing codes prior to installation.

The system shall be installed in accordance with the manufacturer's instructions and recommendations.

ACO Systems, Ltd. 1-2880 Brighton Rd. Oakville, ON L6H 5S3 Tel: (905) 829-0665 Fax: (905) 829-2908

Electronic Contact: Eml: info@acocan.ca Web: www.acoshowerdrain.ca



